



System Fault error is showing on XPS300

Most common cause is the setting of the pressure sensor inside the fan depending on the ambient condition :

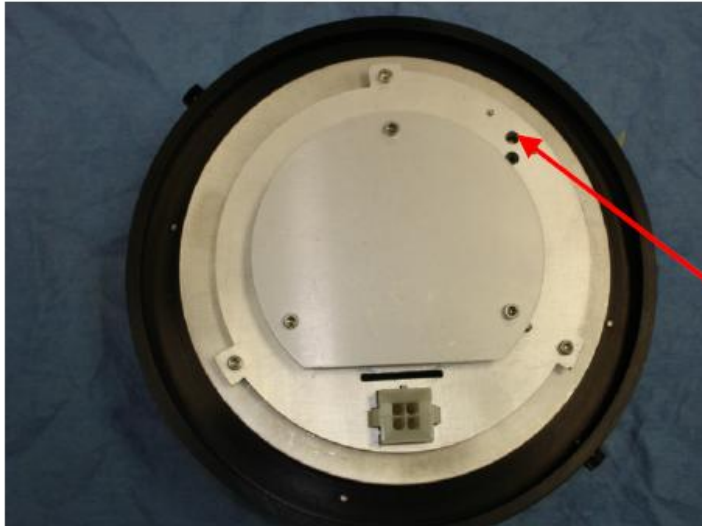

To adjust the vacuum switch use a small straight slot screw driver and turn the adjust screw 1 turn clockwise. Replaced the fan and turn on the power supply. If the System Fault is on try turning the adjust screw 1 turn clockwise again.

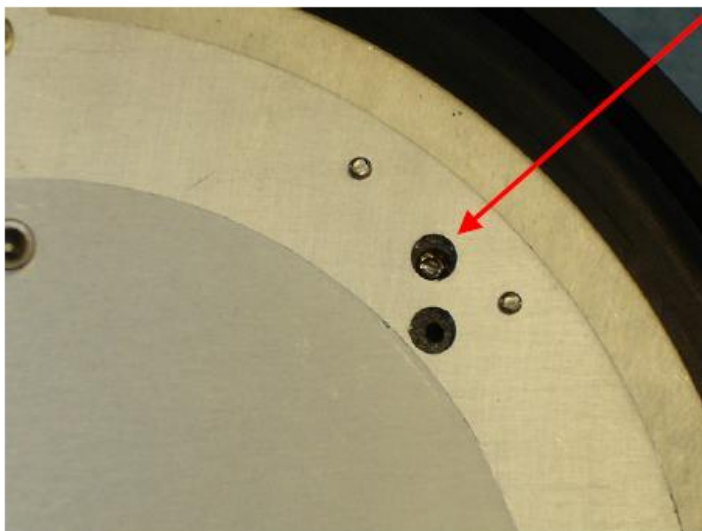

Remove the fan, turn the potentiometer one clockwise and try again.
If *System fault* appears again, turn again one turn and check again.

If after 4-5 turns system fault remains, it means the problem comes from another part.
In this case please contact our technical support (tech@monaderm.com) for further assistance.